


Bulldog Vertical Stack Chassis Plug In Play




Vertical Stack Units
(Cabinet with ERV)



Step 1: Cabinet Install

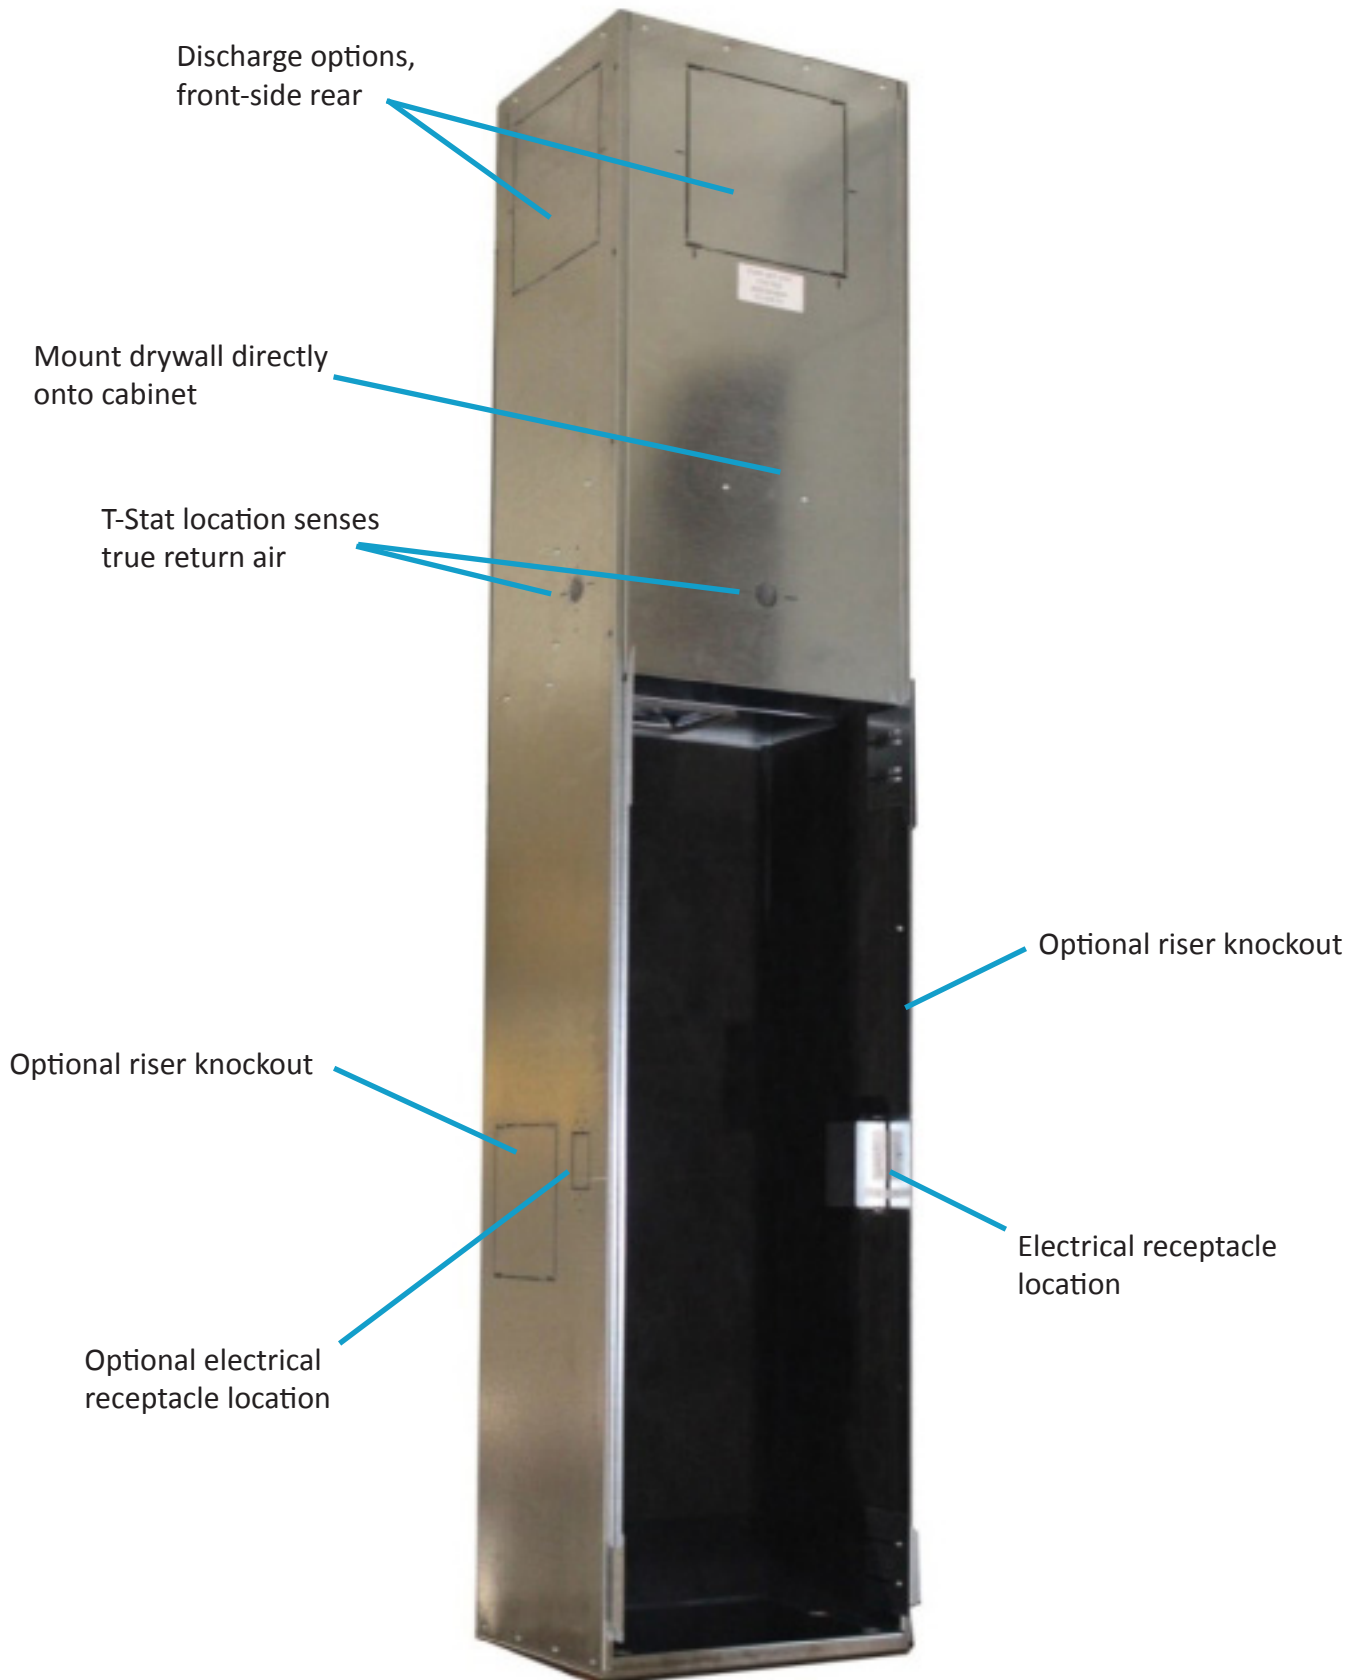


Step 2: Install Risers (Complete with shut off valves)

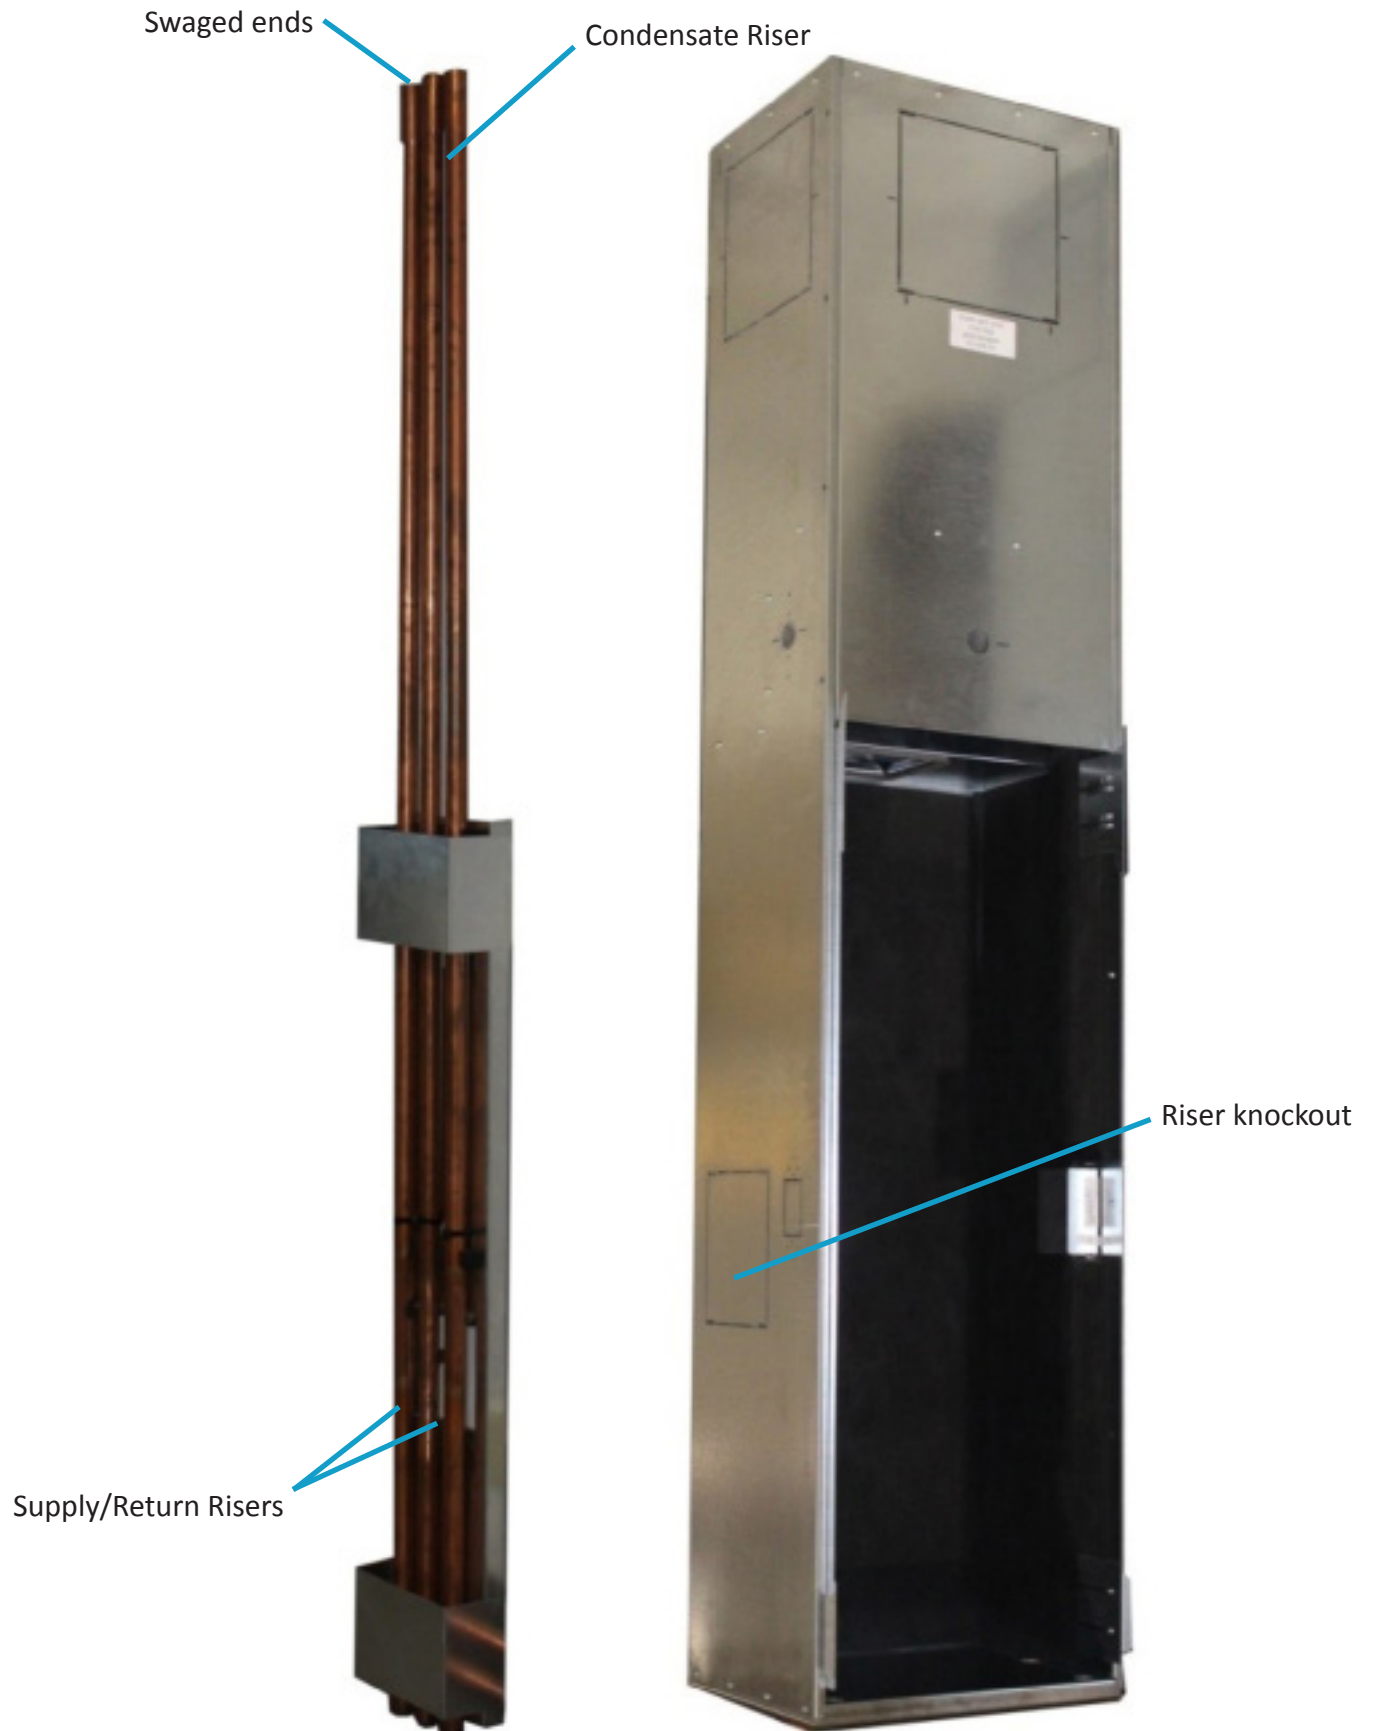

The shut off valves and the electrical outlet can be seen from inside the cabinet.



Front panel clips

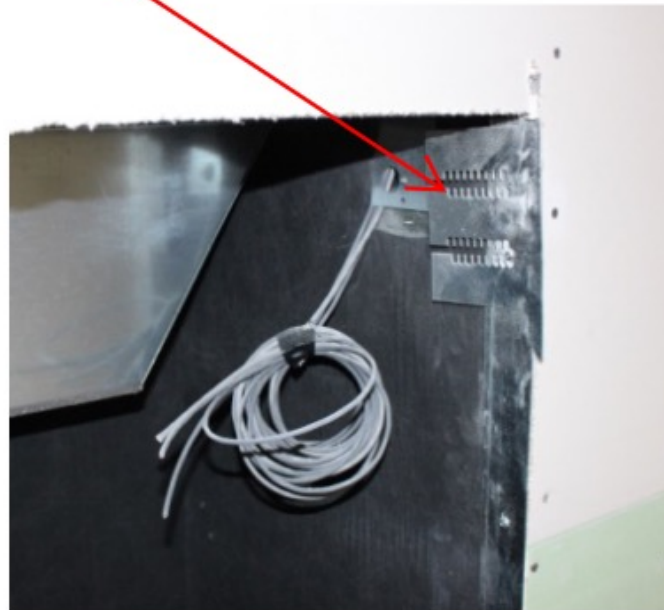

The thermostat wires are brought into the cabinet.

The front panel clips are installed in the cabinet.

Step 3: Install studs around cabinet or install drywall directly onto the cabinet



Drywall installed and the cabinet remains empty of any refrigeration or electrical components throughout the construction site period.



Once the site is clear of any dust and debris, clean and finished, the chassis will ship and is slid into the cabinet. The hoses are attached to the risers, and the electrical cord gets plugged into the outlet.



The hoses and electrical cord shipped already attached to the chassis.

Refrigeration Chassis and ERV installed in cabinet equipped with a hinged door.





CGC Group of Companies, Inc.

150 Britannia Rd E. Unit 1, Mississauga, ON, L4Z 2A4

1-905-568-1661

www.bulldogheatpump.com