BULLDOG HEAT PUMP

Hinged Panel Installation

BEFORE YOU START YOU WILL REQUIRE

1) Red Robertson (Square) Screwdriver (or bit for power screwdriver)

Step 1:

Clear the area of any debris before beginning installation. Insert the chassis into the cabinet.

Step 2:

Locate the panel mounting screws in the top left and right, and the lower left and right.

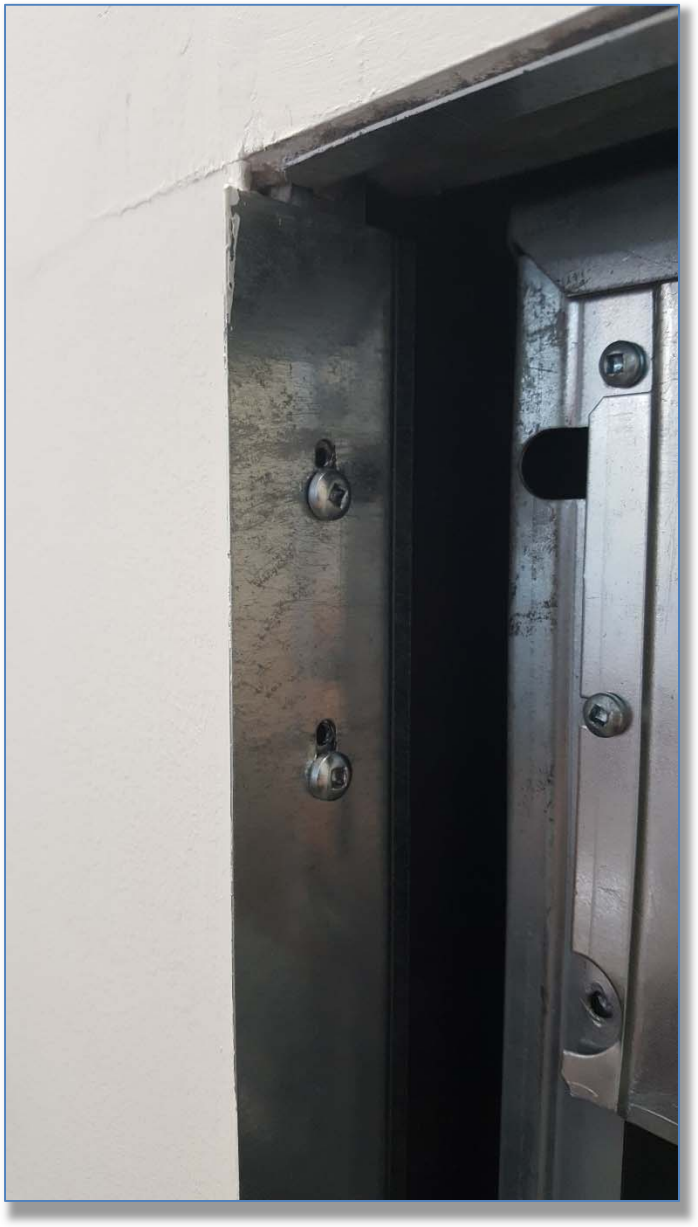

Step 3:

Loosen the panel mounting screws in all four corners.

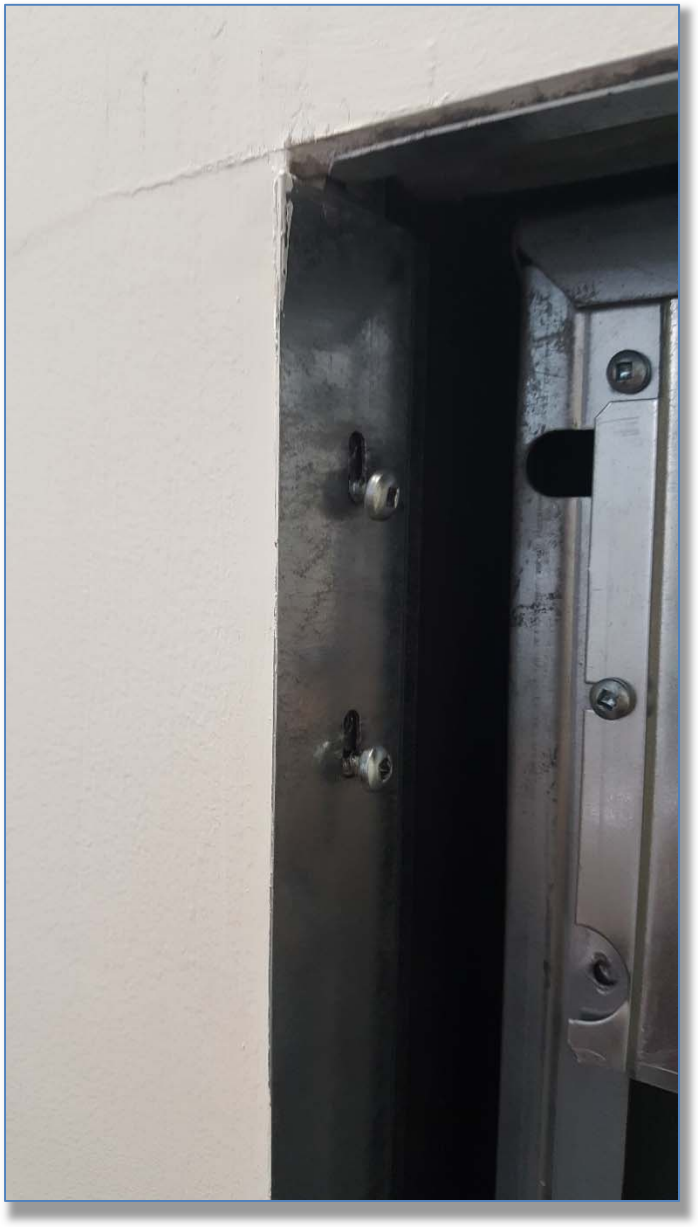

Step 4:

Align the hinged panel to the mounting screws in all four corners.

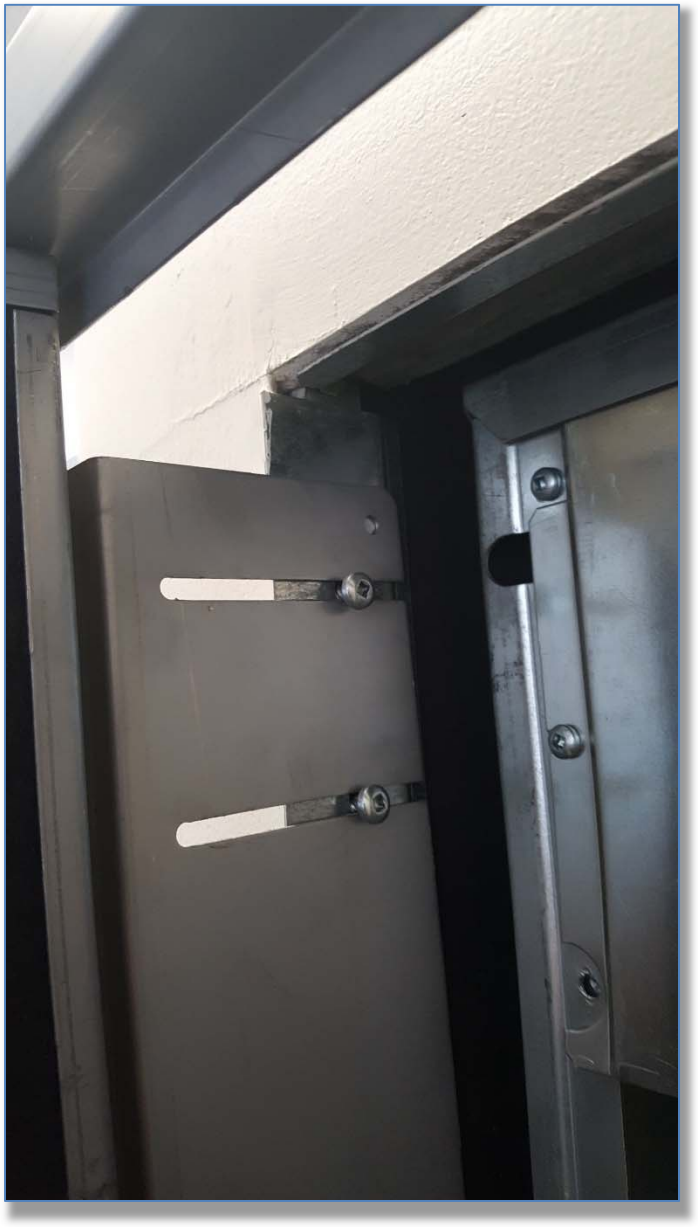

Step 5:

Push the panel flush to the drywall and tighten the mounting screws.

Step 6:

Close the panel and lock it.