


- (1) Water Outlet, 1/2" FPT
- ② Water Inlet, 1/2" FPT
- ③ Condensate Drain, 3/4" FPT
- 4 High Voltage Access, 7/8" S Low Voltage Access, 7/8"

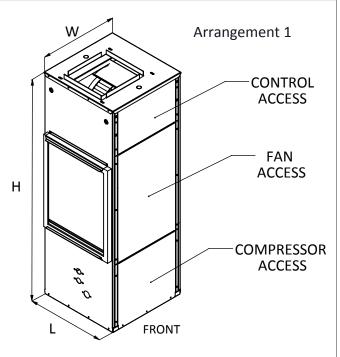


		RECOMMENDED MIN. SERVICE CLEARANCE						
W	L	Η	SUP. AIR W x H	RET. AIR W x H	UNIT WT	Α	В	С
17	17	48	10.5 x 9.5	14 x 19	175Lb	2	36**	6*
	* ^	1	alak.a.ala.ka.	- ! l				

^{*} Non- ducted return air only

REMARKS:

- Pleated disposable filter included. (16" x 20" x 1")
- Right side electrical access available.
- Left return unit (ARR. 1), right return unit (ARR. 2).
- Water piping on same side as filter access.

	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CGC GROUP. ANY PRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CGC GROUP IS PROHIBITED.		NAME	DATE (MM/DD/YYYY)	DIMENSIONAL DATA				
RULLDOG		DRAWN	K.F	06/24/2013	אוט ן	DIMENSIONAL DATA			
HEAT PUMP		CHECKED							
		ENG APPR.	F.A.L	06/24/2013	BULLDOG SpaceKeeper				
	T KOTIIOTED.	REV.	AG	08/14/2015				-	
UNLESS OTHERWIS	Q.A.	F.A.L	08/14/2015	Model	CITICAL TIC	rough SKV-(Λ1 Ω		
DIMENSIONS ARE IN INCHES TOLERANCES UNLESS OTHER FRACTIONAL ± 1/16	COMMENTS:			Model	3 3K V -000 II	noogn skv-k	,,,		
ANGULAR ± 0.5' X: ± .1" XX: ± .06" XXX: ± .06"	DO NOT SCALE DRAWING			SIZE DWG. NO.			REV.		
XXX: ± .032 ± 0050"					SCALE: NTS	WFIGHT:	SHEET 1 OF 1	-	

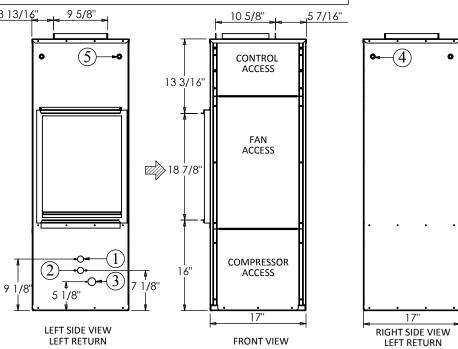

^{**} Recommended for closet door open (Door closed 2")