



- ① Water Outlet, 1/2" FPT
- ② Water Inlet, 1/2" FPT
- ③ Condensate Drain, 3/4" FPT
- 4 High Voltage Access, 7/8"
- (5) Low Voltage Access, 7/8"

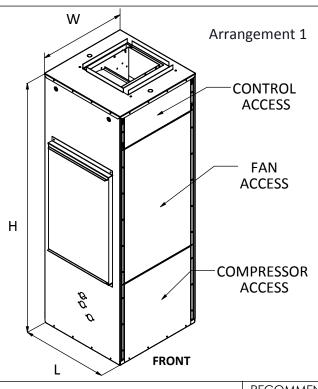

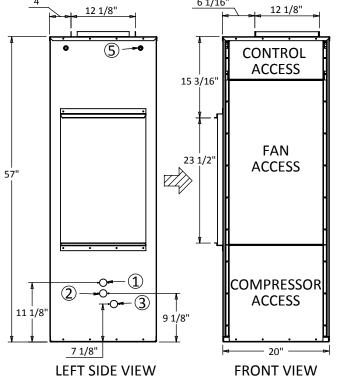

•
•
•
·
, -

			RECOMMENDED MIN. SERVICE CLEARANCE					
W	L	Н	SUP. AIR W x H	RET. AIR W x H	UNIT WT	Α	В	С
20	20	57	12.13 x 12.13	15.5 x 24	240Lb	2	36**	6*

- * Non- ducted return air only
- ** Recommended for closet door open (Closed door 2") REMARKS:
- 1. Pleated disposable filter included. (16" x 25" x 1")
- 2. Right side electrical access available.
- 3. Left return unit (ARR. 1), right return unit (ARR. 2).
- 4. Water piping on same side as filter access.

		THE INFORMATION CONTAINED		NAME	(MM/DD/YYYY)	r	NIA.	A ENICIONI A I	DAT	۸ I
	CO DUILLINGS	IN THIS DRAWING IS THE SOLE PROPERTY OF CGC GROUP.	DRAWN	K.F	06/24/2013	DIMENSIONAL DATA				
	THE AMERICAN		CHECKED							
			ENG APPR.	F.A.L	01/09/2015	ĺ	BULLDOG SpaceKeeper			
			REV.	AG	08/11/2015	Vertical Heat Pump				_
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN NOHES TOLERANCES UNLESS OTHERWISE NOTED ARE. FRACTIONAL ± 0.5° ANGULAR ± 0.5° X. ± 1.1° XX: ± 1.1° XX: ± 0.6° XXX: ± 0.6° XXXX: ± 0.		Q.A.	FL	08/11/2015	Ma		Is SKV-020 throu		036
			COMMENTS:			"	Juc	15 51(1 020 1111 00)	911 510 0	
			do not scale drawing			SIZE A	DWG. I	SKV020-036		REV.
						SCALE:	: NTS	WEIGHT:	SHEET 1 OF 1	