
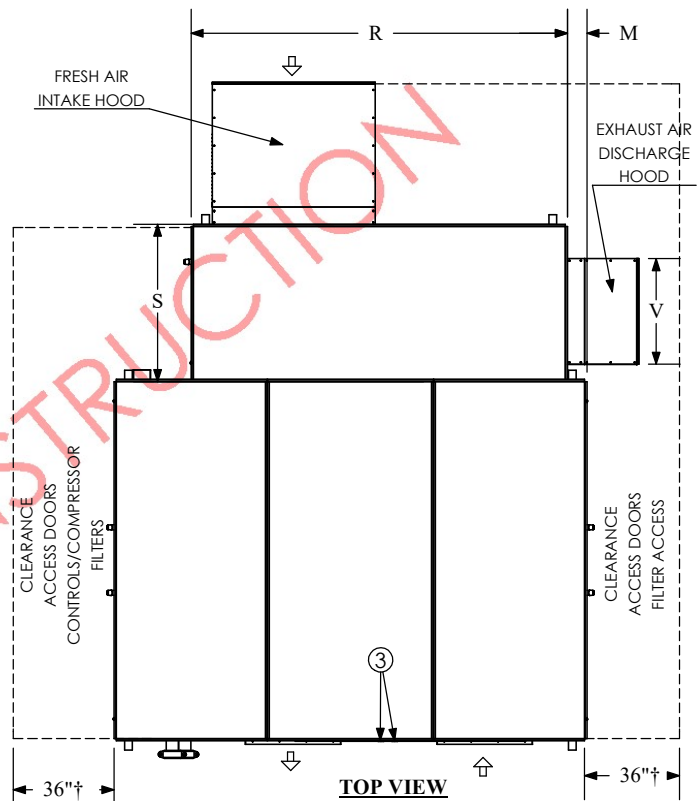


- ①
- ②
- ③
- ④

FLUID IN
 FLUID OUT
 CONDENSATE DRAIN x 2 (1 1/2")
 SUGGESTED AREA FOR ELECTRICAL CONNECTION TO BE FIELD INSTALLED BY OTHERS
DISCLAIMER: DO NOT COVER UNIT NAMEPLATE WHILE MAKING THIS CONNECTION



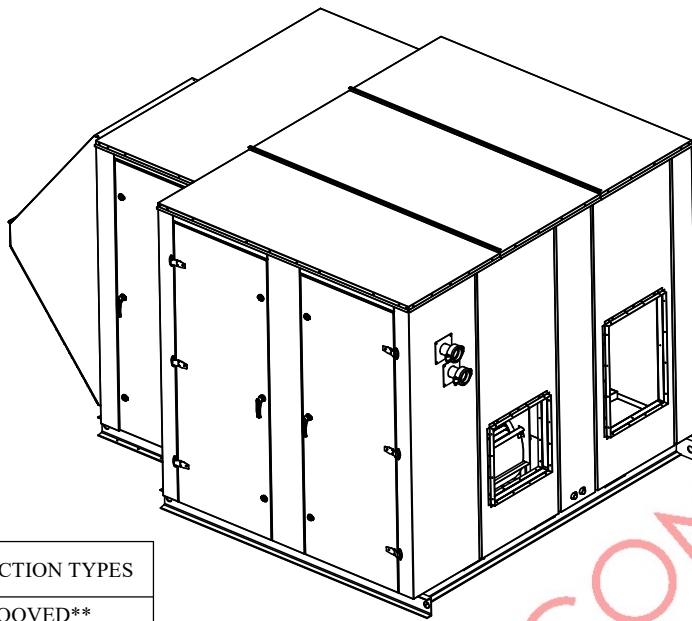


REMARKS

1. FILTERS ARE AS FOLLOWS
 MERV8 PREFILTERS, 24"X24"X2" (QTY: 9)
 MERV13 BAG FILTERS, 24"X24"X15" (QTY: 9)
 MERV8 EXHAUST FILTERS, 24"X24"X2" (QTY: 9)
2. † MINIMUM CLEARANCE FOR SERVICE. NOT ENOUGH FOR HEAT WHEEL REPLACEMENT

CAPACITY (TONS)	WATER PIPE CONNECTIONS*	CONNECTION TYPES
20-30	2" (40 GPM - 60 GPM)	GROOVED**
35-45	2.5" (70 GPM - 90 GPM)	GROOVED**

* Based On 2 GPM/Ton
 ** Mechanical grooved coupling supplied by the manufacturer

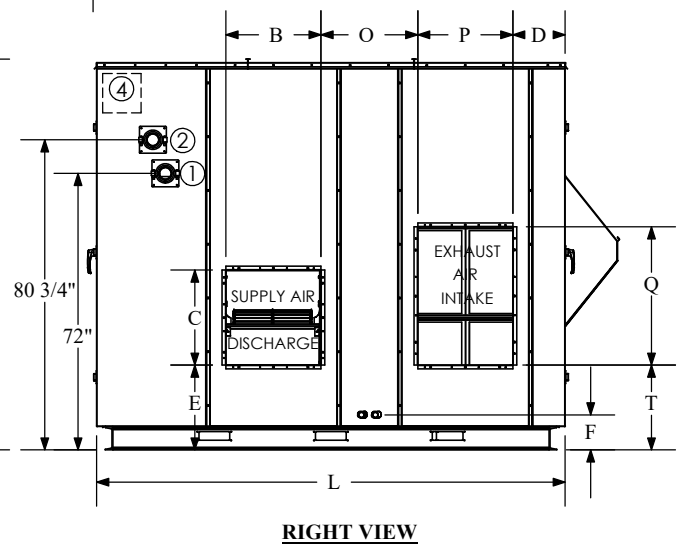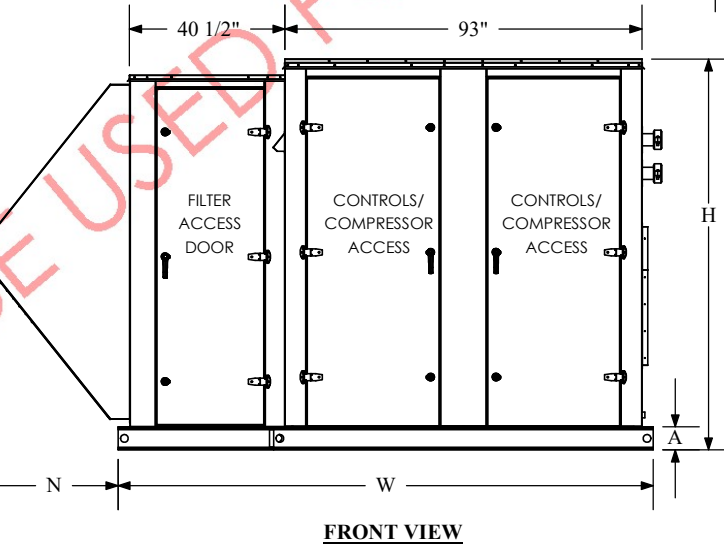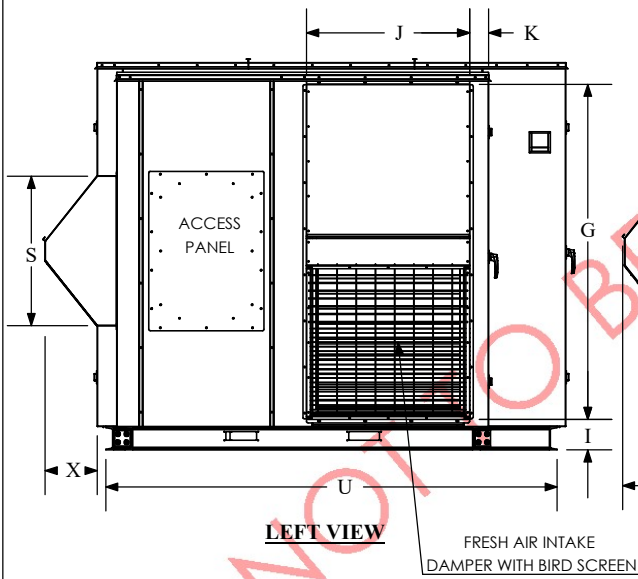

PHYSICAL DATA (IN)																							
H	W	L	A	B	C	D	E	F	G	I	J	K	M	N	O	P	Q	R	S	T	U	V	X
101 3/4"	139 3/8"	122"	6"	24 3/4"	24 3/4"	9 3/4"	22 1/8"	9 1/8"	87 1/4"	8"	42 3/8"	5"	5 1/2"	34 1/2"	25 1/4"	24 3/4"	36"	98"	38 7/8"	22 1/8"	117 5/8"	27 1/2"	13 1/2"

NAME:	DATE (MM/DD/YYYY):	TITLE:
AD	11/4/2021	VARIPAK WITH ENERGY RECOVERY WHEEL SIZE 7 (OUTDOOR)
CHECKED BY:	FS	11/4/2021
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CCG GROUP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CCG GROUP IS PROHIBITED.		HORIZONTAL INTAKE & SUPPLY HORIZONTAL EXHAUST IN HORIZONTAL EXHAUST DISCHARGE
BULLDOG HEAT PUMP PROPRIETARY AND CONFIDENTIAL		UNIT MODEL: VPWR7XX SCALE: NTS